KBG121500 12V 150Ah

KAISE series is Superior Cycle VRLA Gel battery. By combining the newly developed nano gel electrolyte and high cyclic paste, KBG series delivers high cycle life, excellent high&low temperature performance, it is highly suited for renewable energy systems, outdoor telecom and other harsh environment require high cycle applications.

12 V voltage | 150Ah capacity | GEL tech | 12 years design life




Technical Specifications

Nominal Voltage (V)	12 (6 cells per unit)
Designed Floating Life (25 oC)	12 Years
Nominal Capacity (25 oC)	150 Ah @ 10HR-rate (to 1.80Vpc)
Dimension (mm)	L483mm x W170mm x H241mm
Approx. Weight	42 kg (92.6 lbs)
Terminal Type	F-M8 or cable (torque:10~12N.m for F-M8)
Internal Resistance	< 0.0035 Ohm (fully charged @ 20°C)
Max. Charge Current	37.5A
Max. Discharge Current (5S)	1200 A
Short Circuit Current	3400 A
Self Discharge	Approx. 2.5% per month @ 20°C
Ambient Temperature	Discharge: -40~60°C Charge: -20~55°C Storage: -25~45°C
Float Charge Voltage	13.5-13.62V/block @25 C (-3mV/ cell/ C)
Equalize and cycle Use Charge Voltage	14.1-14.4V/block @25 C
Container Material	ABS (UL94-V0 optional)

Complied standards

- IEC 60896-21/22
- GB /T19638
- IEC 61427
- JIS C8704
- BS 6290 part 4

Battery Dimensions

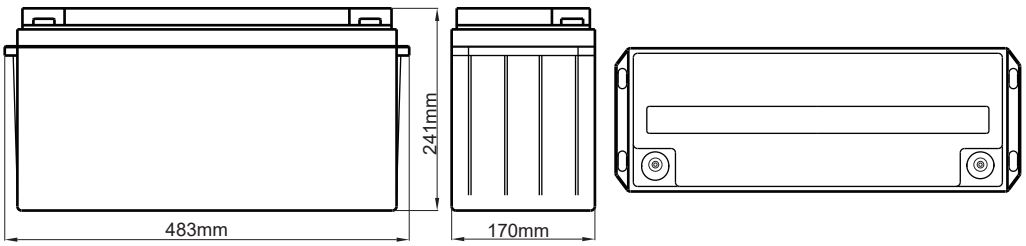

TERMINAL(optional)



Screw F-M8 or Cable

Constant Current Discharge Characteristics: Amps (25°C)

F.V/T ime	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.70V	155	96.4	57.1	41.5	33.1	27.6	18.8	15.5	8.18
1.75V	150	94.5	56.1	40.9	32.7	27.3	18.5	15.3	8.03
1.80V	143	91.4	54.9	40.1	32.0	26.6	18.1	15.0	7.87
1.85V	135	87.4	52.8	38.8	31.1	26.0	17.7	14.6	7.69

Constant Power Discharge Characteristics: W/cell (25°C)

F.V/T ime	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.70V	291	182	109	79.4	63.6	53.3	36.6	30.4	16.1
1.75V	283	180	108	78.7	63.4	53.1	36.4	30.2	15.9
1.80V	273	175	106	78.0	62.5	52.2	35.8	29.8	15.7
1.85V	260	170	103	76.1	61.2	51.4	35.3	29.2	15.5

Parameters for Solar & Wind Applications

Long time discharge capacity for Solar & Wind applications


Capacity	C_{24} (Ah)	C_{48} (Ah)	C_{72} (Ah)	C_{100} (Ah)	C_{120} (Ah)
KBG121500	161	170	174	182	188
Final Voltage			1.85V		

Solar & Wind applications parameters settings


Over voltage disconnect:	2.45±0.01V/cell @ 25°C
Regulation/equalize voltage:	2.40±0.01V/cell @ 25°C
Array roconnection voltage:	2.25±0.005V/cell @ 25°C
Float voltage setting:	2.27±0.005V/cell @ 25°C
Low voltage alarm voltage:	1.95±0.005V/cell @ 25°C
Low voltage disconnect:	1.90±0.005V/cell @ 25°C
Load reconnect voltage:	2.09±0.01V/cell @ 25°C
Temp. compensate coefficienty:	-5mV/cell/°C

KBG121500 12V 150Ah


Charge Characteristic

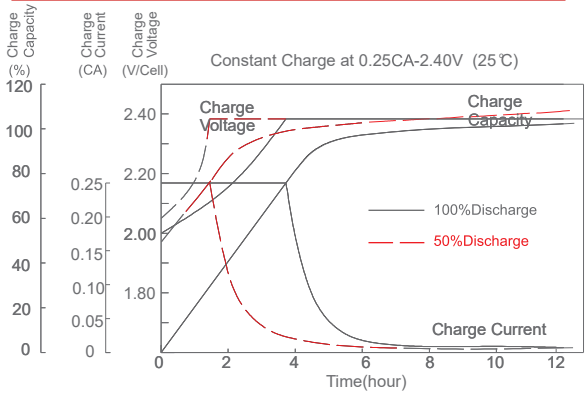


Discharge Characteristic (25°C)

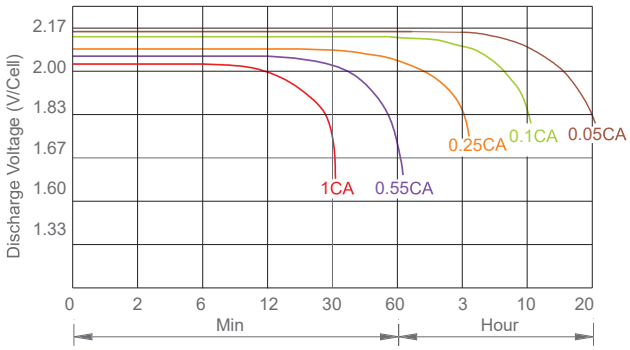


Temperature vs Float Life

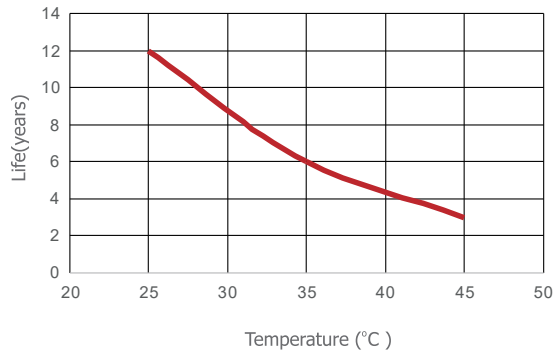


Self Discharge Characteristics

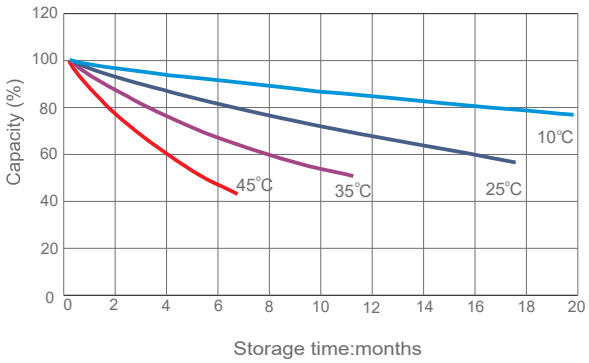


Depth of Discharge vs Cycle Life (25°C)

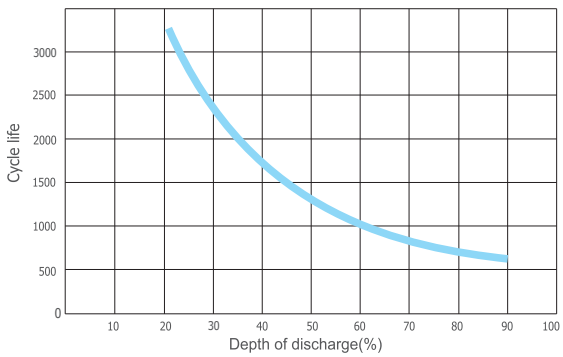

Capacity vs Temperature

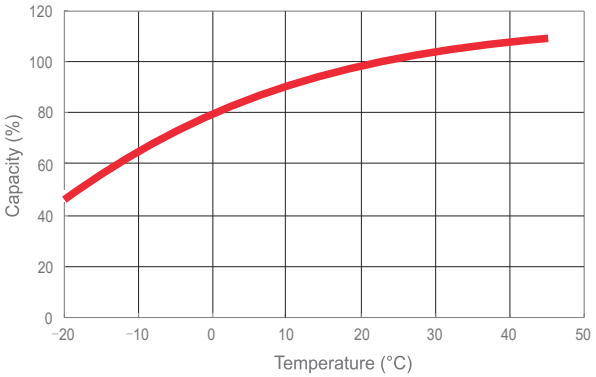

KBG121500 Horizontal Installation Drawing

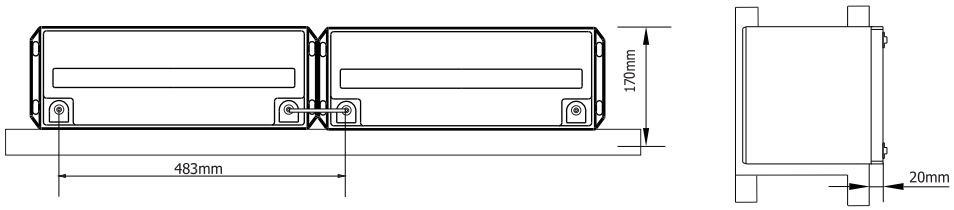

Linelectric
En línea contigo

Linelectric EIRL
http://www.linelectric.cl
ventas@linelectric.cl
Phone: +56 2 3230 8489